





RB35

Voltage: 12.8V | Capacity: 35 Ah | Energy: 448 Wh | Group:U1

LITHIUM IRON PHOSPHATE BATTERY LIFEPO4

ELECTRICAL SPECIFICATIONS		
Nominal Voltage	12.8 V	
Nominal Capacity	35 Ah	
Capacity @ 25A	84 min	
Resistance	≤50 mΩ @ 50% SOC	
Efficiency	99%	
Self Discharge	<3% per Month	
Maximum Modules in Series	3	

DISCHARGE SPECIFICATIONS	
Maximum Continous Discharge Current	35 A
Peak Discharge Current	70 A (7.5 s ±2.5 s)
BMS Discharge Current Cut-Off	170 A ±20 A (20 ±5 ms)
Recommended Low Voltage Disconnect	11 V
BMS Discharge Voltage Cut-Off	8 V (2.0 ±0.08 vpc) (140 ±60 ms)
Reconnect Voltage	10 V (2.5 ±0.10 vpc)
Short Circuit Protection	200-600 μs


TEMPERATURE SPECIFICATIONS		
Discharge Temperature	-4 to 140 °F (-20 to 60 °C)	
Charge Temperature*	-4 to 113 °F (-20 to 45 °C)	
Storage Temperature	23 to 95 °F (-5 to 35 °C)	
BMS High Temperature Cut-Off	176 °F (80 °C)	
Reconnect Temperature	122 °F (50 °C)	

^{*}Refer to charge currents below 32°F (0°C)

MECHANICAL SPECIFICATIONS		
Dimensions (L x W x H)	7.7 x 5.2 x 6.7" 195 x 131 x 171 mm	
Weight	9.9 lbs (4.5 kg)	
Terminal Type	M8 x 1.25 x 12mm	
Terminal Torque	80 - 100 in-lbs (9 - 11 N-m)	
Case Material	ABS	
Enclosure Protection	IP66	
Cell Type - Chemistry	Cylindrical - LiFePO ₄	

CHARGE SPECIFICATIONS		
Recommended Charge Current	17.5 A	
Maximum Charge Current	35 A	
Charge Current 14 to 32 °F (-10 to 0 °C)	≤0.1 C	
Charge Current -4 to 14 °F (-20 to -10 °C)	≤0.05 C	
Recommended Charge Voltage	14.2 V - 14.6 V	
BMS Charge Voltage Cut-Off	15.2 V (3.8 ±0.025 vpc) (1.1 ±0.4 s)	
Reconnect Voltage	14.4 V (3.6 ±0.050 vpc)	
Balancing Voltage	14.4 V (3.6 ±0.025 vpc)	

COMPLIANCE SPECIFICATIONS	
Certifications	UN38.3 (battery) CE (battery) UL1642 & IEC62133 (cells)
Shipping Classification	UN 3480, CLASS 9

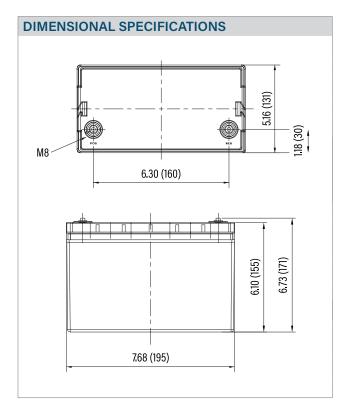








RB35

Voltage: 12.8V | Capacity: 35 Ah | Energy: 448 Wh |

LITHIUM IRON PHOSPHATE BATTERY LiFePO4

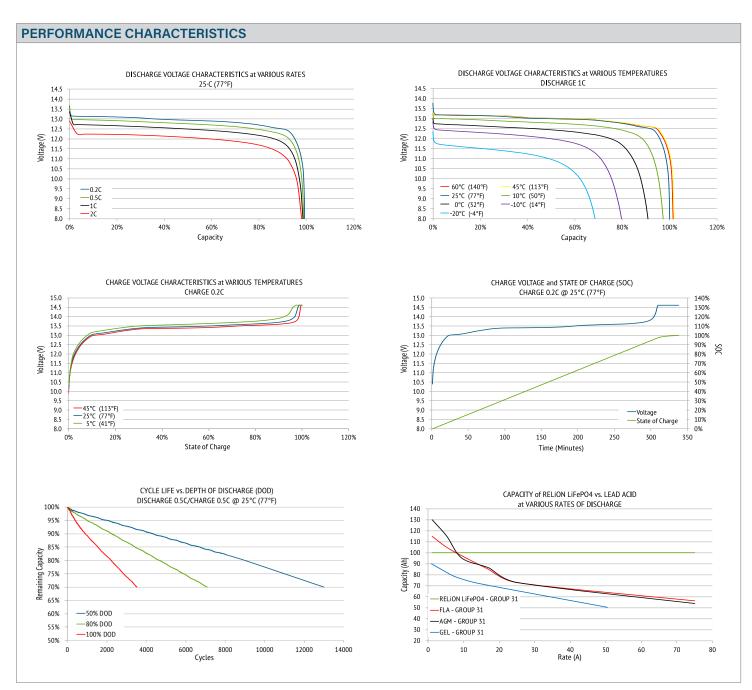





Hong Kong | Singapore | Malaysia | Australia Email: info@centaur-asiapacific.com Website: www.centaur-asiapacific.com







