


Speedseed 2300

The Speed-Seed models are ideal to overseed large areas quickly. The individual conical ring sections create seed pockets in the soil in which seed is accurately delivered, the holes are then closed with the roller; the additional spike rear roller increases the holes to 1918 per m² (2294 yd²).

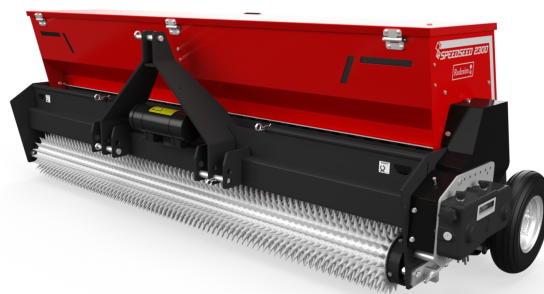

Specifications

SKU	124.240.006
Working width (m)	2.3
Working width (inch)	94.4
Max. Working depth (mm)	5 - 20
Max. Working depth (inch)	.19 - .78
Max. Working speed (km h)	12
Max. Working speed (mph)	7.5
Weight (kg)	650
Weight (lbs)	1430
Sowing distance (mm)	30
Sowing distance (inch)	1.18
Hopper capacity (L)	337
Hopper capacity (cu.ft.)	11.8
Number of holes single spiked roller (m ²)	990
Number of holes single spiked roller (sq.yd)	1184
Min. Tractor HP required	40
Min. Lifting capacity 610 mm behind the lifting eyes (kg)	650
Min. Lifting capacity 24 inch behind the lifting eyes (lbs)	1430
Three-point hitch	3-point CAT 1-2
Lubricant	EP2
Limited availability	1

Distributed by:



www.centaur-asiapacific.com
info@centaur-asiapacific.com

*Hong Kong, Macau, Malaysia (Johor).