


## Verti-Drain® 1513

The lightweight Verti-Drain® 1513 can work to a depth of 6" / 150mm and is well suited to sensitive turf surfaces. The belt driven machine operates a high speed while giving a neat and consistent hole pattern. An optional rear roller can be added to aid preening

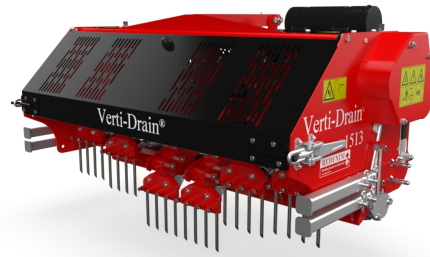

### Specifications

SKU	111.215.013
Working width (m)	1.32
Working width (inch)	52
Max. Working depth (mm)	150
Max. Working depth (inch)	6
Working speed at hole spacing 65 mm	1.8
Working speed at hole spacing 2-1 2 inch (mph)	1.1
Weight (kg)	425
Weight (lbs)	937
Hole distance with 12 mm tines (mm)	55
Hole distance with 1 2 x 6 inch tines (inch)	1/2/08
Hole spacing distance driving direction (mm)	25 - 125
Hole spacing distance driving direction (inch)	1-May
Max diameter solid tine (mm)	12 x 150
Max diameter solid tine (inch)	1/2 x 6
Max diameter hollow tine (mm)	19 x 150
Max diameter hollow tine (inch)	3/4 x 6
Min. Tractor HP required	25
Min. lifting capacity (kg)	650
Min. lifting capacity (LBS)	1450
Max. capacity with spacing 65 mm (m <sup>2</sup> hr)	2388
Max. capacity with spacing 2-1 2 inch (ft <sup>2</sup> hr)	25703
Three-point hitch	3-point CAT 1
Rpm Max.	540
Gear case oil	80W90 - 0.9
Lubricant	EP 2



Hong Kong | Singapore | Malaysia | Australia

Email: [info@centaur-asiapacific.com](mailto:info@centaur-asiapacific.com)

Website: [www.centaur-asiapacific.com](http://www.centaur-asiapacific.com)

