


Verti-Drain® 1517

The lightweight Verti-Drain® 1517 can work to a depth of 6" / 150mm and is well suited to sensitive turf surfaces. The belt driven machine operates at a high speed while giving a neat and consistent hole pattern. An optional rear roller can be added to aid preening.



| Specifications | |
|--|---------------|
| SKU | 111.215.017 |
| Working width (m) | 1.76 |
| Working width (inch) | 69 |
| Max. Working depth (mm) | 150 |
| Max. Working depth (inch) | 6 |
| Working speed at hole spacing 65 mm | 1.8 |
| Working speed at hole spacing 2-1 2 inch (mph) | 1.1 |
| Weight (kg) | 520 |
| Weight (lbs) | 1146 |
| Hole distance with 12 mm tines (mm) | 55 |
| Hole distance with 1 2 x 6 inch tines (inch) | 1/2/08 |
| Hole spacing distance driving direction (mm) | 25 - 125 |
| Hole spacing distance driving direction (inch) | 1-May |
| Max diameter solid tine (mm) | 12 x 150 |
| Max diameter solid tine (inch) | 1/2 x 6 |
| Max diameter hollow tine (mm) | 19 x 150 |
| Max diameter hollow tine (inch) | 3/4 x 6 |
| Min. Tractor HP required | 28 |
| Min. lifting capacity (kg) | 750 |
| Min. lifting capacity (LBS) | 1653 |
| Max. capacity with spacing 65 mm (m ² hr) | 3136 |
| Max. capacity with spacing 2-1 2 inch (ft ² hr) | 33759 |
| Three-point hitch | 3-point CAT 1 |
| Rpm Max. | 540 |
| Gear case oil | 80W90 - 0.9 |
| Lubricant | EP 2 |

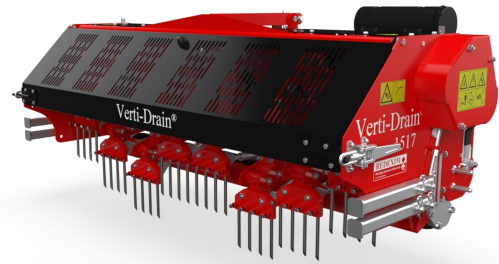

Hong Kong | Singapore | Malaysia | Australia

Email: info@centaur-asiapacific.com

Website: www.centaur-asiapacific.com

