


## Verti-Drain® 7215

The Verti-Drain® 7215 is well suited to lower HP tractors, the compact yet capable allows for aeration to a depth of 25cm / 10" on the more sensitive of turf areas. The 7215 is particularly popular on golf tees, greens and approaches due to its nimbleness.

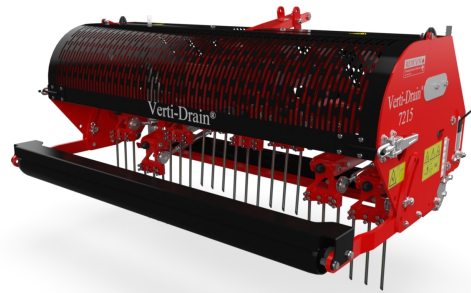

### Specifications

|  |               |
|--|---------------|
| SKU  | 7215          |
| Working width (m)  | 1.56          |
| Working width (inch)                                       | 61            |
| Max. Working depth (mm)                                    | 250           |
| Max. Working depth (inch)                                  | 10            |
| Working speed at hole spacing 65 mm                        | 1             |
| Weight (kg)  | 550           |
| Weight (lbs)   | 1210          |
| Hole distance with 12 mm tines (mm)                        | 65            |
| Hole distance with 1 2 x 6 inch tines (inch)               | 2.5           |
| Hole distance with 18 mm tines (mm)                        | 100           |
| Hole distance with 3 4 x 9 inch tines (inch)               | 4             |
| Hole spacing distance driving direction (mm)               | 25 - 165      |
| Hole spacing distance driving direction (inch)             | 1 - 6-1/2     |
| Max diameter solid tine (mm)                               | 18 x 250      |
| Max diameter solid tine (inch)                             | 3/4 x 10      |
| Max diameter hollow tine (mm)                              | 25 x 250      |
| Max diameter hollow tine (inch)                            | 1 x 10        |
| Min. Tractor HP required                                   | 25            |
| Min. lifting capacity (kg)                                 | 700           |
| Min. lifting capacity (LBS)                                | 1540          |
| Max. capacity with spacing 65 mm (m <sup>2</sup> hr)       | 1560          |
| Max. capacity with spacing 2-1 2 inch (ft <sup>2</sup> hr) | 11000         |
| Three-point hitch  | 3-point CAT 1 |
| Rpm Max.   | 500           |
| Gear case oil  | 80W90         |
| Lubricant  | EP 2          |
| Slip clutch setting  | 400 Nm        |



Hong Kong | Singapore | Malaysia | Australia

Email: [info@centaur-asiapacific.com](mailto:info@centaur-asiapacific.com)

Website: [www.centaur-asiapacific.com](http://www.centaur-asiapacific.com)

