


Verti-Drain® 7215

The Verti-Drain® 7215 is well suited to lower HP tractors, the compact yet capable allows for aeration to a depth of 10"/ 25 cm on the more sensitive of turf areas. The 7215 is particularly popular on golf tees, greens and approaches due to its nimbleness.

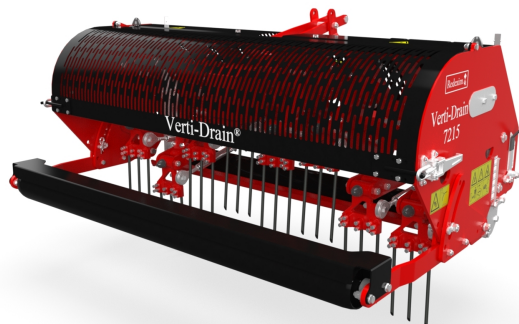

Specifications

SKU	7215
Operation	Tractor Mounted
Working width (m)	1.56
Working width (inch)	61
Max. Working depth (mm)	250
Max. Working depth (inch)	10
Working speed at hole spacing 65 mm (km h)	1
Weight (kg)	550
Weight (lbs)	1210
Hole distance with 12 mm tines (mm)	65
Hole distance with 1 2 x 6 inch tines (inch)	2.5
Hole distance with 18 mm tines (mm)	100
Hole distance with 3 4 x 9 inch tines (inch)	4
Hole spacing distance driving direction (mm)	25 - 165
Hole spacing distance driving direction (inch)	1 - 6-1/2
Max. Diameter solid tine (mm)	18 x 250
Max. Diameter solid tine (inch)	3/4 x 10
Max. Diameter hollow tine (mm)	25 x 250
Max. Diameter hollow tine (inch)	1 x 10
Min. Tractor HP required	25
Min. Lifting capacity 610 mm behind the lifting eyes (kg)	700
Min. Lifting capacity 24 inch behind the lifting eyes (lbs)	1540
Max. capacity with spacing 65 mm (m ² hr)	1560
Max. capacity with spacing 2 1 2 inch (ft ² hr)	11000
Three-point hitch	3-point CAT 1
Rpm Max.	500
Gear case oil	80W90
Lubricant	EP 2
Slip clutch setting	400 Nm

Distributed by:



www.centaur-asiapacific.com
info@centaur-asiapacific.com

*Hong Kong, Macau, Malaysia (Johor).