


## Verti-Drain® 7521

The Verti-Drain® 7521 offers robust functionality and depth in one machine, it has the ability to work to 16" / 400mm deep. The 7521 is popular with contractors and golf clubs in part due to its ability to accept a large range of tines for different applications.

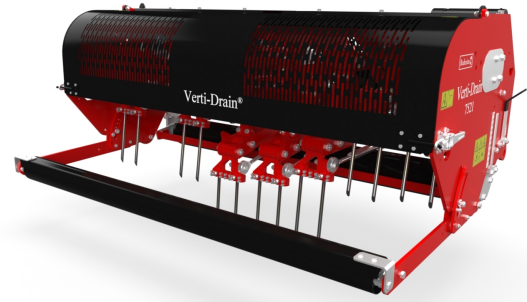

### Specifications

SKU	7521
Operation	Tractor Mounted
Working width (m)	2.1
Working width (inch)	83
Max. Working depth (mm)	400
Max. Working depth (inch)	16
Weight (kg)	1375
Weight (lbs)	3025
Hole distance with 12 mm tines (mm)	65
Hole distance with 1 2 x 6 inch tines (inch)	2.5
Hole distance with 24 mm tines (mm)	129
Hole distance with 1 x 16 inch tines (inch)	5
Hole spacing distance driving direction (mm)	50-195
Hole spacing distance driving direction (inch)	2 - 7-1/2
Max. Diameter solid tine (mm)	24 x 400
Max. Diameter solid tine (inch)	1 x 16
Max. Diameter hollow tine (mm)	32 x 300
Max. Diameter hollow tine (inch)	1-1/4 x 12
Min. Tractor HP required	55
Min. Lifting capacity 610 mm behind the lifting eyes (kg)	1650
Min. Lifting capacity 24 inch behind the lifting eyes (lbs)	3600
Max. capacity with spacing 65 mm (m <sup>2</sup> hr)	1470
Max. capacity with spacing 2 1 2 inch (ft <sup>2</sup> hr)	13400
Three-point hitch	3-point CAT 2
Rpm Max.	500
Gear case oil	80W90 - 5.8
Lubricant	EP2
Slip clutch setting	800 Nm

### Distributed by:



[www.centaur-asiapacific.com](http://www.centaur-asiapacific.com)  
[info@centaur-asiapacific.com](mailto:info@centaur-asiapacific.com)

\*Hong Kong, Macau, Malaysia (Johor).