





RB100-D

Voltage: 12.8V | Capacity: 100 Ah | Energy: 1280 Wh

LITHIUM IRON PHOSPHATE BATTERY LIFEPO4

ELECTRICAL SPECIFICATIONS		
Nominal Voltage	12.8 V	
Nominal Capacity	100 Ah	
Capacity @ 25A	240 min	
Resistance	≤30 mΩ @ 50% SOC	
Efficiency	99%	
Self Discharge	<3% per Month	
Maximum Modules in Series	4	

DISCHARGE SPECIFICATIONS		
Maximum Continous Discharge Current	100 A	
Peak Discharge Current	200 A (7.5 s ±2.5 s)	
BMS Discharge Current Cut-Off	280 A ±50 A (9 ±4 ms)	
Recommended Low Voltage Disconnect	11 V	
BMS Discharge Voltage Cut-Off	8 V (2.0 ±0.08 vpc) (140 ±60 ms)	
Reconnect Voltage	9.2 V (2.3 ±0.1 vpc)	
Short Circuit Protection	200-600 μs	


TEMPERATURE SPECIFICATIONS		
Discharge Temperature	-4 to 140 °F (-20 to 60 °C)	
Charge Temperature*	-4 to 113 °F (-20 to 45 °C)	
Storage Temperature	23 to 95 °F (-5 to 35 °C)	
BMS High Temperature Cut-Off	176 °F (80 °C)	
Reconnect Temperature	122 °F (50 °C)	

^{*}Refer to charge currents below 32°F (0°C)

MECHANICAL SPECIFICATIONS		
Dimensions (L x W x H)	13.2 x 6.9 x 7.5" 335 x 174 x 191 mm	
Weight	30.2 lbs (13.7 kg)	
Terminal Type	M8 x 1.25 x 12mm	
Terminal Torque	80 - 100 in-lbs (9 - 11 N-m)	
Case Material	ABS	
Enclosure Protection	IP66	
Cell Type - Chemistry	Cylindrical - LiFePO ₄	

CHARGE SPECIFICATIONS		
Recommended Charge Current	5 A - 50 A	
Maximum Charge Current	100 A	
Charge Current 14 to 32 °F (-10 to 0 °C)	≤0.1 C	
Charge Current -4 to 14 °F (-20 to -10 °C)	≤0.05 C	
Recommended Charge Voltage	14.2 V - 14.6 V	
BMS Charge Voltage Cut-Off	15.6 V (3.9 ±0.025 vpc) (1.1 ±0.4 s)	
Reconnect Voltage	15.2 V (3.8 ±0.05 vpc)	
Balancing Voltage	14.4 V (3.6 ±0.025 vpc)	

COMPLIANCE SPECIFICATIONS	
Certifications	CE (battery) UN38.3 (battery) UL1642 & IEC62133 (cells)
Shipping Classification	UN 3480, CLASS 9

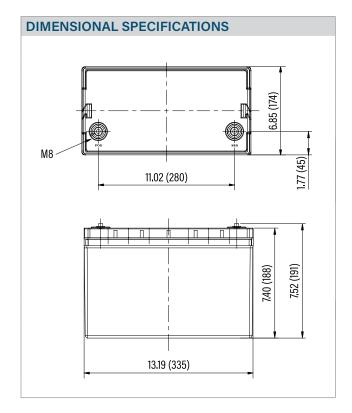








RB100-D

Voltage: 12.8V | Capacity: 100 Ah | Energy: 1280 Wh

LITHIUM IRON PHOSPHATE BATTERY LIFEPO4

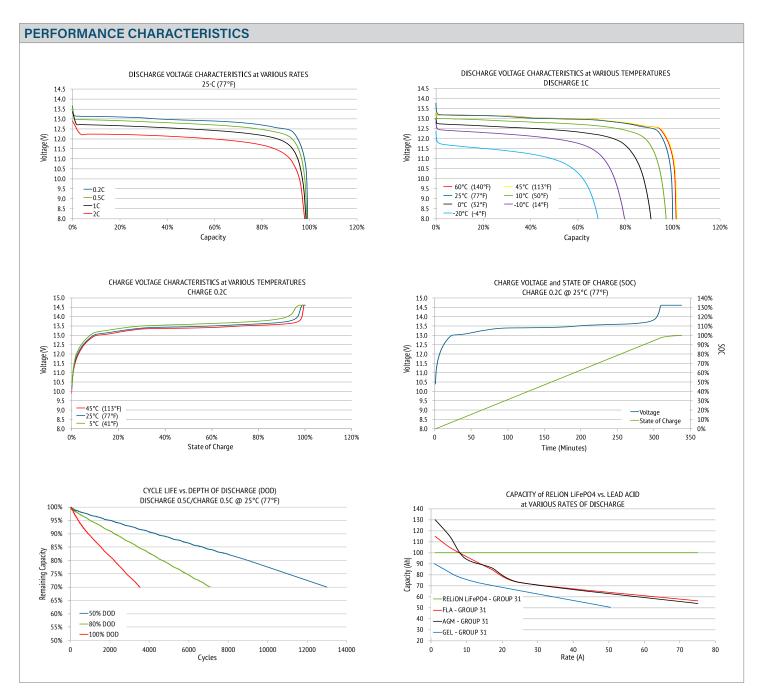





Hong Kong | Singapore | Malaysia | Australia Email: info@centaur-asiapacific.com Website: www.centaur-asiapacific.com







