


imants

Campey
TURF CARE SYSTEMS
QUALITY GROUND CARE EQUIPMENT

OFFICIAL
imants
DISTRIBUTOR
campeyturfcare.com

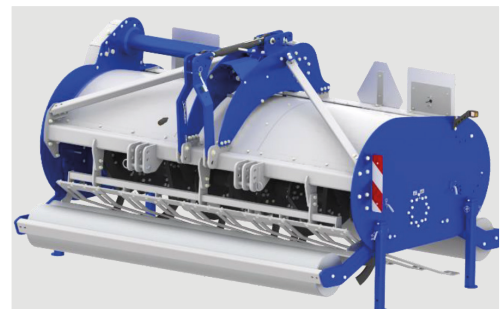

IMANTS

ShockWave

1.0 / 1.6 / 2.1 / 220 / 275 /
eXtreme 275 / 366

The Imants ShockWave is the perfect linear decompactor for heavily used areas where play can't stop. This machine is designed to revitalise fine turf and sports fields by relieving soil compaction, improving aeration and removing surface water, all whilst causing minimal surface disruption so play can resume quickly and safely. All ShockWave models feature a no-chains, direct drive design, maintenance free 'sealed for life' bearings and no shear bolts


Imants ShockWave 220/275 brings linear decompaction to wide areas, making it the perfect machine for contractors. Using thicker 15mm knives and featuring hydraulic depth adjustment from the tractor, this machine takes the ShockWave's attributes of relieving soil compaction, improving aeration and removing surface water and applies them to large turf areas that need to be revitalised and ready for action quickly.



Hong Kong | Singapore | Malaysia | Australia
Email: info@centaur-asiapacific.com
Website: www.centaur-asiapacific.com



- Removes surface water

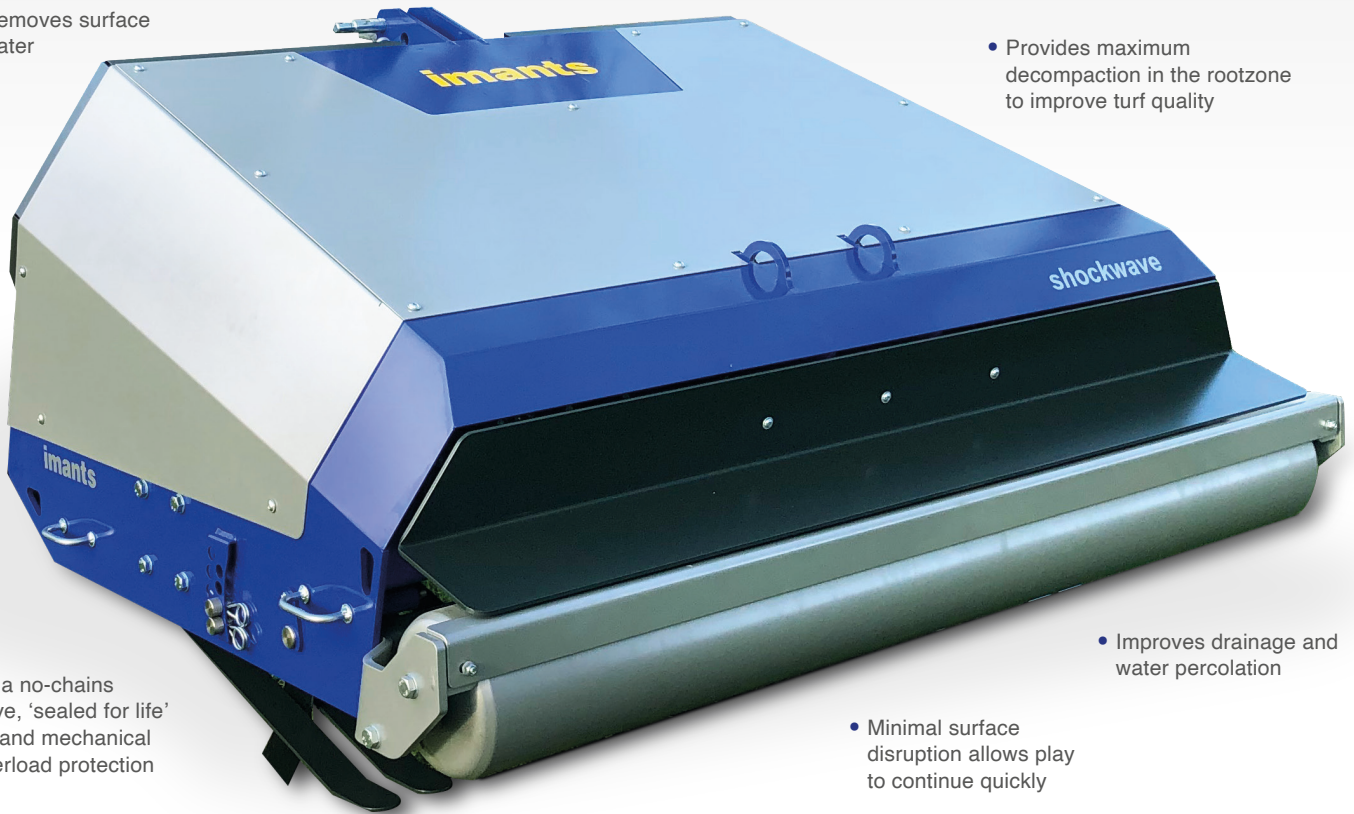

- Provides maximum decompaction in the rootzone to improve turf quality

- Features a no-chains direct drive, 'sealed for life' bearings and mechanical drive overload protection

- Improves drainage and water percolation

- Minimal surface disruption allows play to continue quickly

Designed to revitalise heavy wear areas by relieving soil compaction, improving aeration and removing surface water.

Specification							eXtreme	
	1.0	1.6	2.1	220	275	275	366	
Working width	1.00m	1.60m	2.10m	2.20m	2.75m	2.75m	3.66m	
Working depth	110mm - 250mm	110mm - 250mm	110mm - 250mm	120mm - 280mm	120mm - 280mm	150mm - 330mm	150mm - 350mm	
Number of blades	12	18	24	24	30	30	39	
Blade thickness	12mm	12mm	12mm	15mm	15mm	15mm	15mm	
Blade spacing	265mm	265mm	265mm	275mm	275mm	275mm	277mm	
Machine length	1.38m	1.38m	1.38m	2.20m	2.75m			
Machine width	1.20m	1.75m	2.30m	2.50m	3.00m	2.18m - 3m	2.18m - 3.91m	
Machine weight (approx.)	525kgs	635kg	750kg	1250kg	1750kg	2100kg	2400kg	
Power requirement	41 - 54hp	41 - 54hp	41 - 54hp	80hp +	100hp +	95hp	95hp	
Tractor requirements	540 pto. Creep gear or hydrostatic drive required							
Operating speed	0.5 - 1.5 mph (0.5 - 2.4kph)					0.5 - 1.9mph	0.5 - 1.9mph	
Option: Turf retainer						125kg	166kg	